

Runner systems for wooden drawers

- ▶ Quadro 4D V6 full extension runner, slide on installation, IW 20 (drawer side profile thickness ≤ 15 mm)
- ▶ Load class 30 kg



- ▶ Convenient **slide on installation** with 4D catch and tilt adjustment
- ▶ Catch / tilt adjuster must be ordered separately
- ▶ 30 kg load classes)
- ▶ Optional: Push to open Silent (upgradable in conjunction with Silent System user friendly function)
- ▶ Optional: synchronisation / multi synchronisation (upgradable in conjunction with Push to open / Push to open Silent user friendly function)
- ▶ Tool-less adjustment of drawer front panel: vertically up to + 2 mm, laterally up to +/- 1.5 mm (drawer side profile thickness max. 15 mm), depth up to +/- 2 mm, tilt
- ▶ Load capacity to EN 15338, Level 3
- ▶ Galvanised steel

Nominal length / drawer length NL mm	Order no. / user friendly function					
	Silent System				Push to open	
	Set	Left	Right	PU		PU
250	9 245 382			1 pair	9 247 737	1 pair
280	9 245 383			1 pair		
300	9 245 384			1 pair	9 247 738	1 pair
320	9 245 385			1 pair	9 247 739	1 pair
350	9 245 386			1 pair	9 247 740	1 pair
380	9 245 387			1 pair	9 247 741	1 pair
400		9 245 359	9 245 360	10 ea.	9 247 742	1 pair
420		9 245 361	9 245 362	10 ea.	9 247 743	1 pair
450		9 245 363	9 245 364	10 ea.	9 247 744	1 pair
480		9 245 365	9 245 366	10 ea.	9 247 745	1 pair
500		9 245 367	9 245 368	10 ea.	9 247 746	1 pair
520		9 245 369	9 245 370	1 pair	9 247 747	1 pair
550		9 245 371	9 245 372	1 pair	9 247 758	1 pair
580	9 245 395			1 pair	9 247 759	1 pair
600	9 245 396			1 pair	9 248 444	1 pair

Runner systems for wooden drawers

- ▶ Quadro 4D V6 full extension runner, slide on installation, IW 20 (drawer side profile thickness ≤ 15 mm)
- ▶ Load class 30 kg

Catch and tilt adjustment (Quadro 4D V6)



- ▶ Tool-less adjustment: vertically up to + 2 mm, laterally up to +/- 1.5 mm (drawer side profile thickness max. 15 mm), depth up to +/- 2 mm, tilt
- ▶ Plastic, grey

Article	Order no.	PU
Catch, Quadro 4D, left	9 247 355	100 ea.
Catch, Quadro 4D, right	9 247 356	100 ea.
Tilt adjuster, Quadro 4D, left	9 183 187	100 ea.
Tilt adjuster, Quadro 4D, right	9 183 190	100 ea.

Advice


▶ Push to open Silent	530 - 531	▶ Quality criteria	544
▶ Push to open synchronisation / multi synchronisation	532 - 533		
▶ Accessories	542 - 543		



hettich.com/short/0f8b71


- ▶ Quadro 4D V6 full extension runner, slide on installation, IW 20 (drawer side profile thickness ≤ 15 mm)
- ▶ Load class 30 kg

Planning dimensions

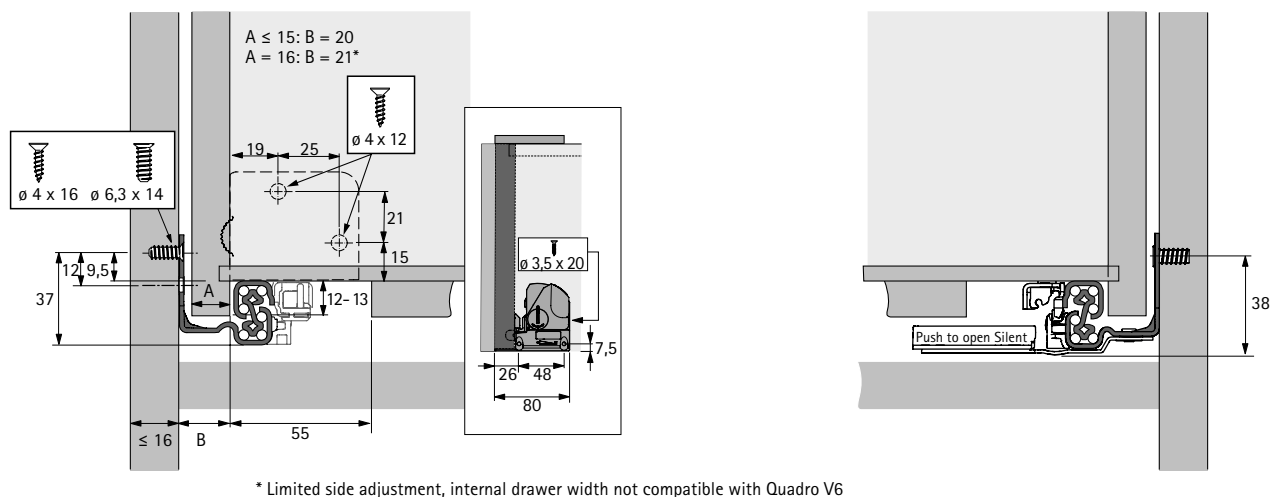


* Limited side adjustment, internal drawer width not compatible with Quadro V6


Planning dimensions

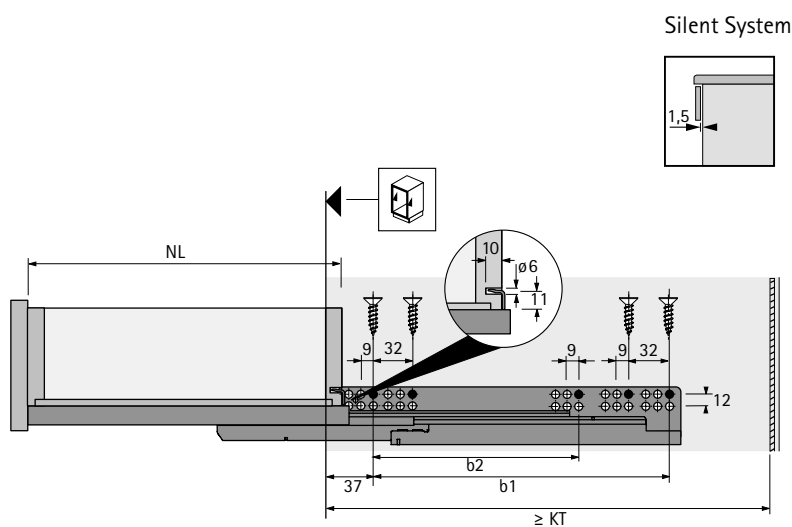

Silent System



Push to open



NL mm	KT mm	b1 mm	b2 mm
250	263	142	-
300	313	192	-
350	363	192	-
400	413	224	-
450	463	256	-
500	513	288	224
550	563	288	224
600	613	352	-

- ▶ 4D catch and tilt adjuster must be ordered separately

Advice

- | | | |
|--|-----------|--------------------|
| ▶ Push to open Silent | 530 - 531 | ▶ Quality criteria |
| ▶ Push to open synchronisation / multi synchronisation | 532 - 533 | |
| ▶ Accessories | 542 - 543 | |

544



hettich.com/short/0f8b71