

Runner systems for wooden drawers

- ▶ **Quadro V6 5D full extension runner, slide on installation (drawer side profile thickness ≤ 16 mm)**
- ▶ **Load classes XS (10 kg) / M (30 kg)**



- ▶ **Slide on installation** with 2D catches for height and side adjustment, integrated depth adjustment, integrated tilt adjustment, integrated radial adjustment
- ▶ Various **user friendly functions** (see ordering table)
- ▶ 2D catch must be ordered separately
- ▶ Adjustments all tool-lees: height adjustment up to + 3 mm, side adjustment up to +/- 1.5 mm, depth adjustment up to + 2/- 1 mm, tilt adjustment up to + 4 mm and radial adjustment up to +/- 1.5 mm
- ▶ Optional: Push to open Silent opening system (upgradable when combined with Silent System)
- ▶ Optional: synchronisation / multi synchronisation (upgradable when combined with Push to open / Push to open Silent)
- ▶ Optional: pull-out shelf support / pull-out shelf locating catch
- ▶ 10 kg and 30 kg load classes for different applications (see ordering table)
- ▶ Platform concept: identical cabinet body, drawer and front panel dimension for Quadro partial and full extension runners for slide on installation
- ▶ Suitable for drawers with a side profile thickness of up to 16 mm
- ▶ Load capacity to EN 15338, Level 3
- ▶ Galvanised steel

Set packaging

Nominal length mm	Order no. / User friendly features		PU
	Silent System	Push to open	
Load class XS (10 kg)			
250	9 332 697		1 pair
270	9 332 698		1 pair
300	9 332 699		1 pair
320	9 332 700		1 pair
350	9 332 701		1 pair
Load class M (30 kg)			
250	9 332 702	9 332 717	1 pair
270	9 332 703		1 pair
300	9 332 704	9 332 718	1 pair
320	9 332 705	9 332 719	1 pair
350	9 332 706	9 332 720	1 pair
380	9 332 707	9 332 721	1 pair
400	9 332 708	9 332 722	1 pair
420	9 332 709	9 332 723	1 pair
450	9 332 710	9 332 724	1 pair
480	9 332 711	9 332 725	1 pair
500	9 332 712	9 332 726	1 pair
520	9 332 713	9 332 727	1 pair
550	9 332 714	9 332 728	1 pair
580	9 332 715	9 332 729	1 pair
600	9 332 716	9 332 730	1 pair

Runner systems for wooden drawers

- ▶ Quadro V6 5D full extension runner, slide on installation (drawer side profile thickness ≤ 16 mm)
- ▶ Load classes XS (10 kg) / M (30 kg)



Bulk packaging

Nominal length mm	Order no. / User friendly features				PU
	Silent System		Push to open		
	left	right	left	right	
Load class XS (10 kg)					
250	9 332 629	9 332 630			10 ea.
270	9 332 631	9 332 632			10 ea.
300	9 332 633	9 332 634			10 ea.
320	9 332 635	9 332 636			10 ea.
350	9 332 637	9 332 638			10 ea.
Load class M (30 kg)					
250	9 332 639	9 332 640	9 332 669	9 332 670	10 ea.
270	9 332 641	9 332 642			10 ea.
300	9 332 643	9 332 644	9 332 671	9 332 672	10 ea.
320	9 332 645	9 332 646	9 332 673	9 332 674	10 ea.
350	9 332 647	9 332 648	9 332 675	9 332 676	10 ea.
380	9 332 649	9 332 650	9 332 677	9 332 678	10 ea.
400	9 332 651	9 332 652	9 332 679	9 332 680	10 ea.
420	9 332 653	9 332 654	9 332 681	9 332 682	10 ea.
450	9 332 655	9 332 656	9 332 683	9 332 684	10 ea.
480	9 332 657	9 332 658	9 332 685	9 332 686	10 ea.
500	9 332 659	9 332 660	9 332 687	9 332 688	10 ea.
520	9 332 661	9 332 662	9 332 689	9 332 690	10 ea.
550	9 332 663	9 332 664	9 332 691	9 332 692	10 ea.
580	9 332 665	9 332 666	9 332 693	9 332 694	10 ea.
600	9 332 667	9 332 668	9 332 695	9 332 696	10 ea.

2D catch



- ▶ For using Quadro V6 5D with wooden drawers
- ▶ Tool-less height adjustment up to + 3 mm and side adjustment up to +/- 1.5 mm
- ▶ Optional: pull-out shelf support
- ▶ Plastic anthracite

Article	Order no.	PU
Set of 2D catches, left and right	9 329 164	1/5 pair
2D catch, left	9 329 162	100 ea.
2D catch, right	9 329 163	100 ea.

Advice

- | | | | |
|--|-----------|--------------------|-----|
| ▶ Push to open Silent | 384 - 385 | ▶ Quality criteria | 419 |
| ▶ Push to open synchronisation / multi synchronisation | 386 - 387 | | |
| ▶ Accessories | 388 | | |




hettich.com/short/lic2aq0

Runner systems for wooden drawers



- Quadro V6 5D full extension runner, slide on installation (drawer side profile thickness ≤ 16 mm)
- Load classes XS (10 kg) / M (30 kg)

Front cross section

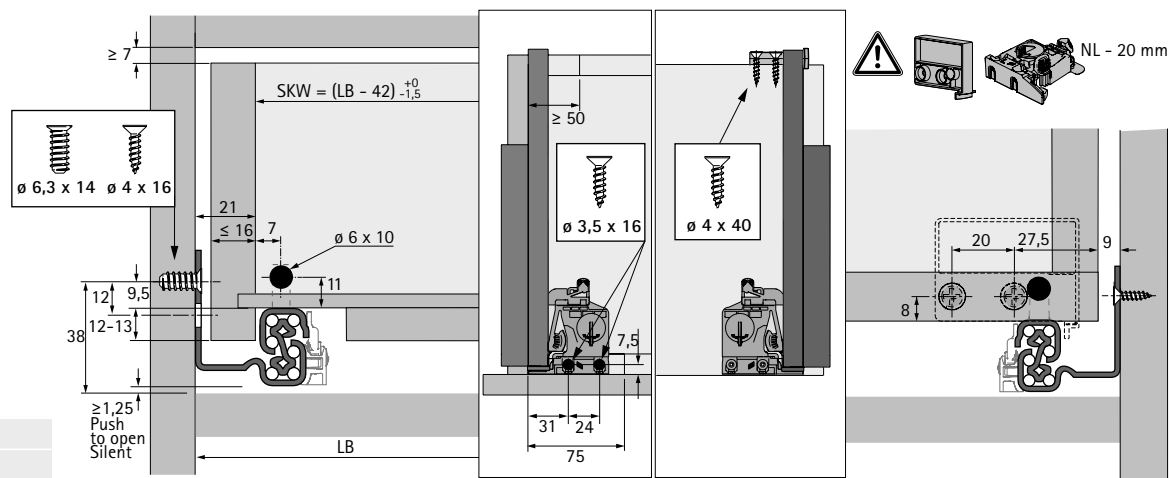

Side cross section

NL mm	b1 mm
250	160
270	160
300	160
320	224
350	224
380	224
400	224
420	224
450	256
480	256
500	256
520	256
550	256
600	256

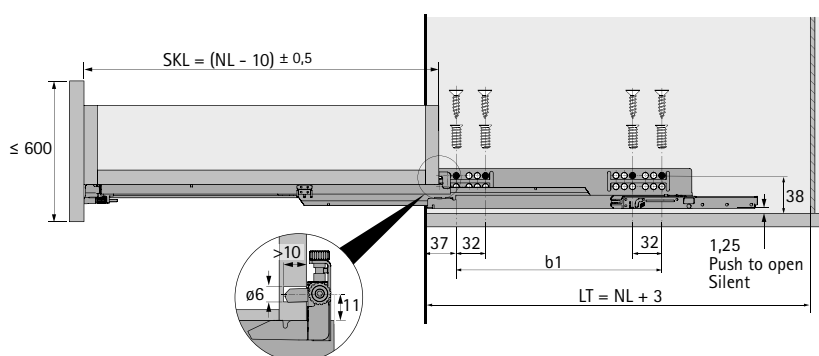

Advice

- | | | | |
|--|-----------|--------------------|-----|
| ► Push to open Silent | 384 - 385 | ► Quality criteria | 419 |
| ► Push to open synchronisation / multi synchronisation | 386 - 387 | | |
| ► Accessories | 388 | | |

