


AvanTech YOU double walled drawer system

► Push to open Silent opening system for Actro YOU

Push to open Silent opening system

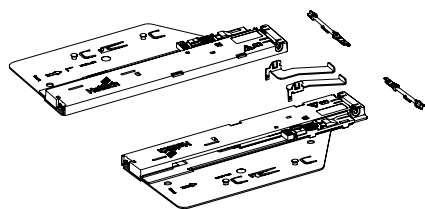

- For optimum performance and activation, fitting an optional synchronisation function is recommended

Set comprises:

- 1 Push to open Silent unit, left and right
- 1 activator, left and right
- 2 adapters for synchronisation

Total weight kg	Load class Actro	Nominal length mm	Order no. #	PU
< 10	XS (10 kg)	270 – 350	9 257 890	1 set
8 – 20	L (40 kg)	270 – 600	9 257 891	1 set
10 – 40	L (40 kg)	350 – 600	9 257 892	1 set
20 – 70	XL (70 kg)	450 – 650	9 257 893	1 set

Recommendation for drawer (front panel height up to approx. 150 mm, light loading)*

Nominal length mm	Nominal width mm											
	275	300	350	400	500	600	700	800	900	1000	1100	1200
270												
300												
350												
400												
450												
500												
550												
650												

Recommendation for pot-and-pan drawer (front panel height up to approx. 300 mm, medium duty loading)*

Nominal length mm	Nominal width mm											
	275	300	350	400	500	600	700	800	900	1000	1100	1200
270												
300												
350												
400												
450												
500												
550												
650												

Recommendation for pot-and-pan drawer (front panel height up to approx. 300 mm, carrying heavy load, e.g. with stacks of plates)*

Nominal length mm	Nominal width mm											
	275	300	350	400	500	600	700	800	900	1000	1100	1200
270												
300												
350												
400												
450												
500												
550												
650												

Order no. Push to open Silent:

9 257 890

9 257 891

9 257 892


9 257 893

* Recommendations for applications (front panel 19 mm chipboard, normal household loading), please refer to our online configurator to get more exact recommendations for customer chosen front panel dimensions and materials.

AvanTech YOU double walled drawer system

► Push to open Silent opening system for Actro YOU

Optional synchronisation for Push to open Silent

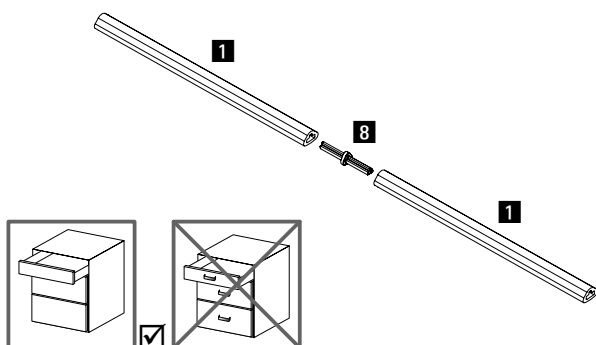

Synchronisation bar:


- For cutting to length, length 2000 mm
- Aluminium, anodised

Connector:

- For extending synchronisation bar / optimising synchronisation bar offcut waste
- Plastic, grey

Article	Order no.	PU
1 Synchronisation bar	9 236 718	1/100 ea.
8 Connector	9 221 295	1/20 ea.


Optional multi-synchronisation for Push to open Silent

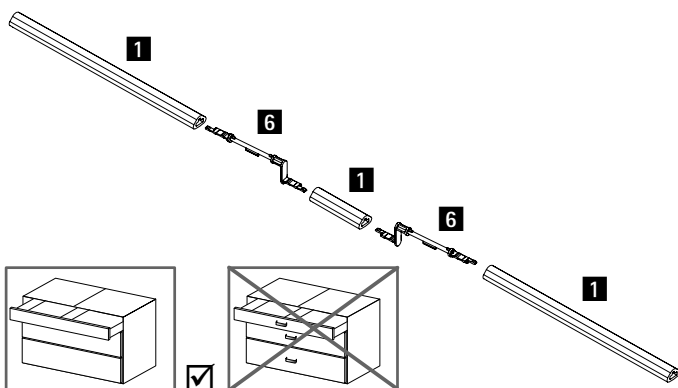

- Use recommended in conjunction with two drawers connected by one front panel
- Aluminium, anodised, grey plastic

Article	Order no.	PU
1 Synchronisation bar	9 236 718	1/100 ea.
6 Push to open Silent multi synchronisation adapter	9 278 452	1/20 ea.


Flexible adapter for Push to open Silent synchronisation

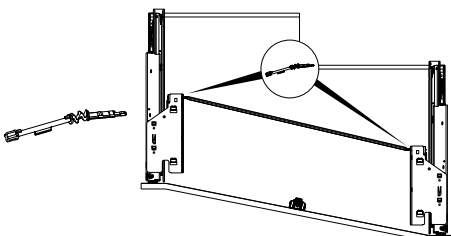

- For use in conjunction with lowered drawer runners with angled or curved fronts
- Depth offset max. 150 mm
- Angle at synchronisation bar max. 25°
- Replaces the adapter for synchronisation in the Push to open Silent set

Order no.	PU
9 262 213	1/20 ea.

Deflector for Push to open Silent synchronisation

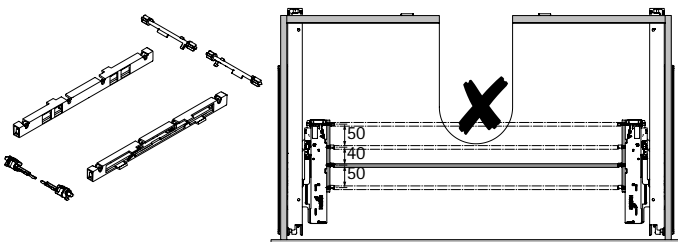

- For use, e.g. with U-bend applications
- Permits synchronisation in 3 different depth positions

Set comprises:

- 2 housings with premounted deflection bar
- 2 adapters for Push to open unit
- 2 adapters for synchronisation bar

Order no.	PU
9 278 453	1 set

Advice

- | | | | |
|---|-----------|---|-----------------------|
| ► AvanTech YOU drawer | 220 - 225 | ► Design options / accessories / illumination | 250 - 259 |
| ► AvanTech YOU pot-and-pan drawer | 226 - 229 | ► Actro YOU / Quadro V6 YOU drawer runners | 260 - 269 |
| ► AvanTech YOU Inlay pot-and-pan drawer | 230 - 232 | ► Push to open Silent | 262 - 263 / 266 - 267 |
| ► Internal front panel options | 234 - 239 | ► Quality criteria | 356 |



hettich.com/short/370f63